


RM-SERIES CONVEYOR

Model: RM-Series

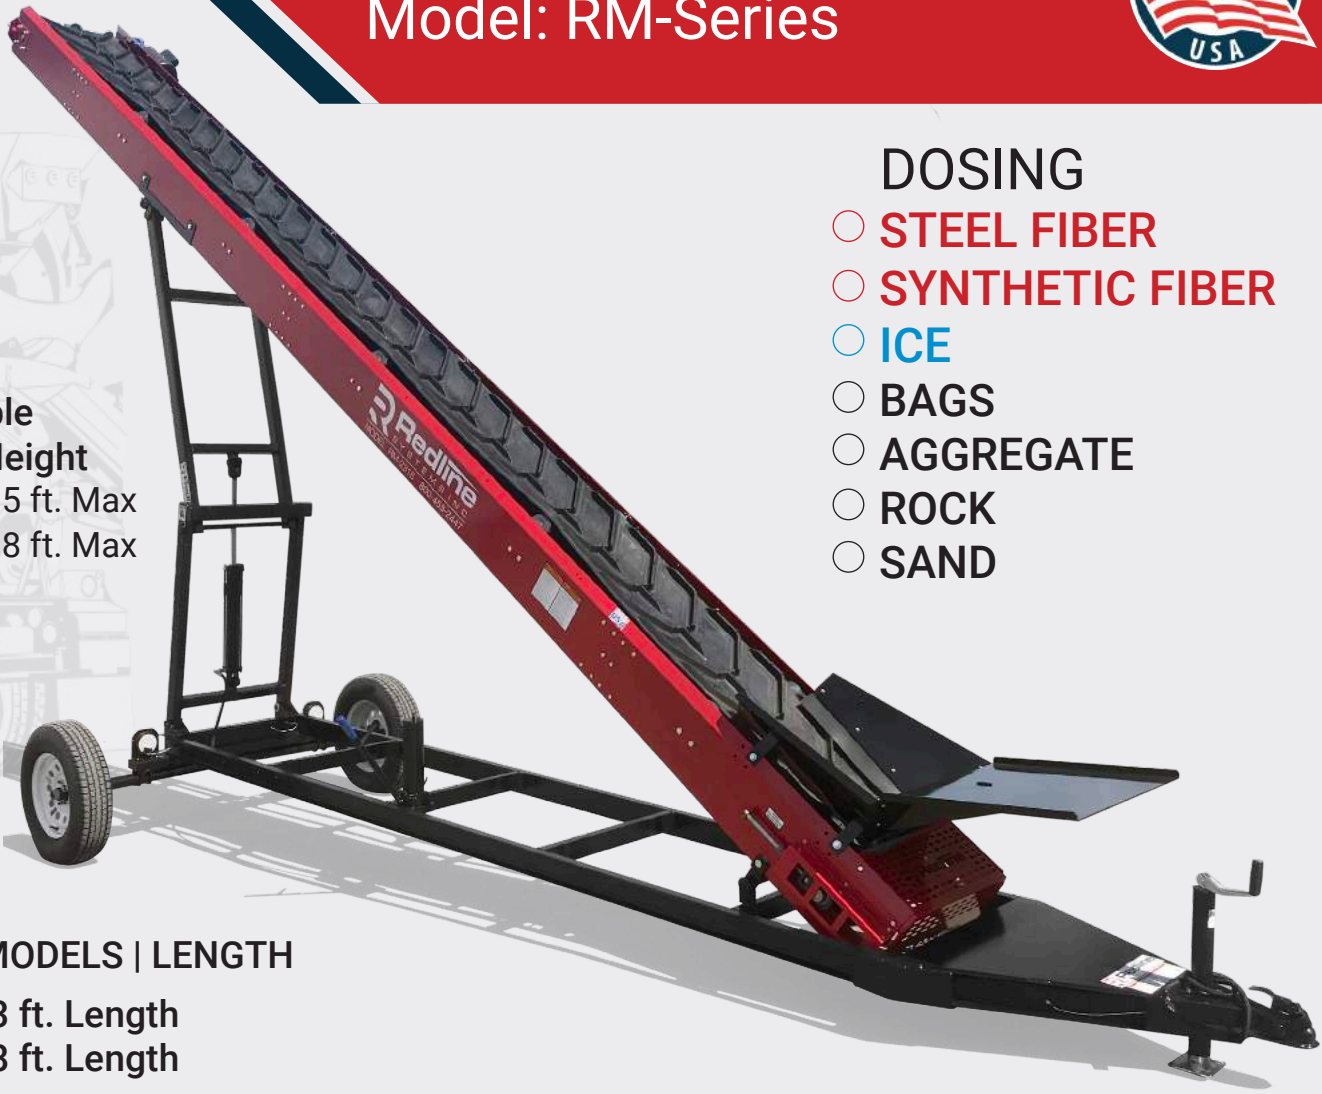

Adjustable
Discharge Height
23' conveyor = 15 ft. Max
28' conveyor = 18 ft. Max

- DOSING**
- STEEL FIBER**
 - SYNTHETIC FIBER**
 - ICE**
 - BAGS**
 - AGGREGATE**
 - ROCK**
 - SAND**

CONVEYOR MODELS | LENGTH

RM-2318 = 23 ft. Length
RM-2818 = 28 ft. Length



POWER DRIVE 110V Power

or Honda Gas
Engine

Optional Add-ons

- Trailer Lights
- Loading Deck
- Bag Ripping Blade
- Discharge Chute
- Belt Covers
- Pintle Ring Hitch
- Outrigger Jacks
- Mini-Cleat Top Belt
- Large Capacity Hoppers

Conveyor

- 18" Wide Belt
- 35 Degree Troughed Belt
- Heavy Duty 4" CEMA B Idlers
- Adjustable Belt Tension
- Chevron Cleated Belt
- 1.5 cubic ft. Loading Hopper


Portable Undercarriage

- Adjustable Lifting Arms
- Tow-able Hitch
- 3500 lbs capacity Axle
- Hydraulic Incline lift adjustment
- Hydraulic Hand Pump


**Safety Restrictor orifice
for slow hydraulic lowering
speed**

RM-2318

RM-2818

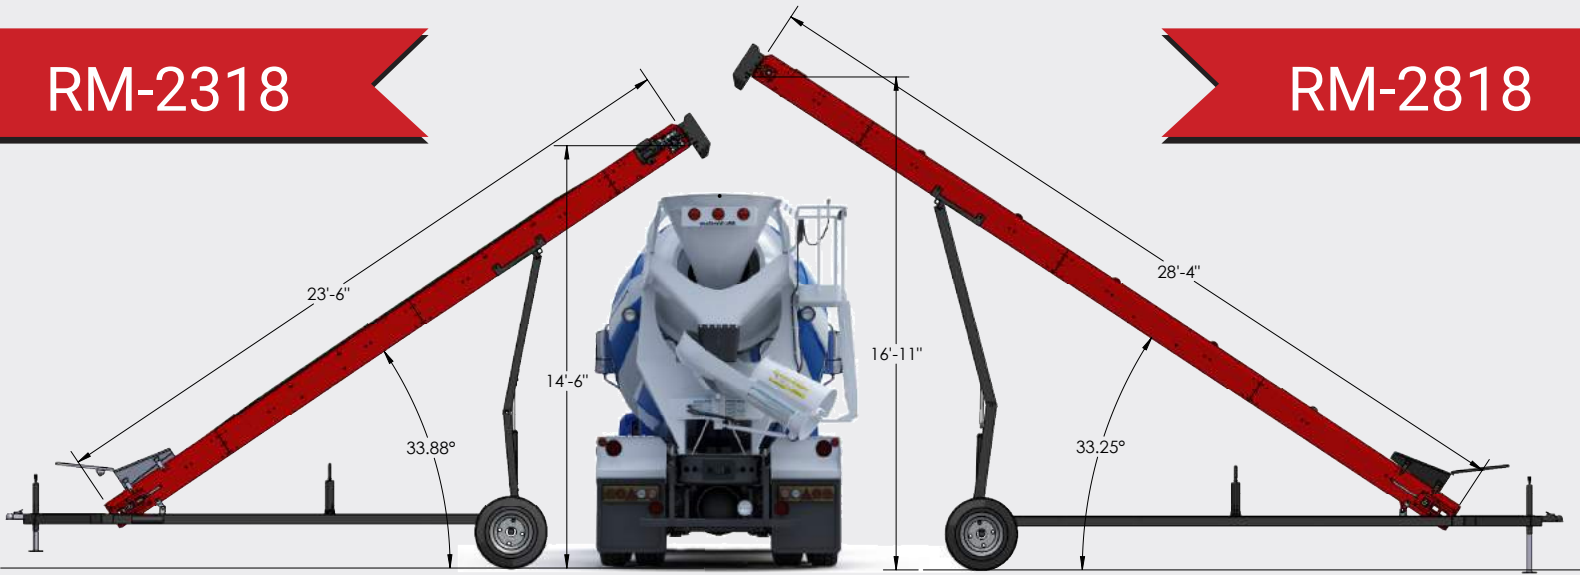

POPULAR ACCESSORIES AND OPTIONS

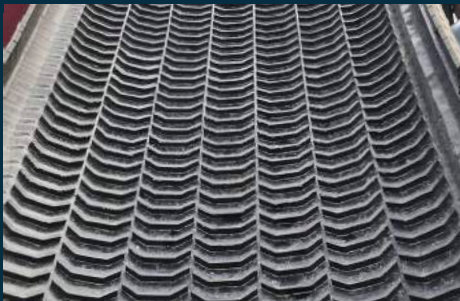

MINI-CLEAT TOP FOR FIBER



HOPPER DECK WITH BLADE



BELT COVERS



CUSTOM HOPPERS



DISCHARGE DEFLECTOR PLATE



TRAILER TOW LIGHTS